## (19) World Intellectual Property Organization International Bureau



## A DERIK ENNINGEN I STEINE INKN EERIK ENTIN ENNIN EN EN HETTE TOM ENNINGERE EN IN ERKE ENDER HET DE KURK FOR E

(43) International Publication Date 1 September 2005 (01.09.2005)

**PCT** 

## (10) International Publication Number WO 2005/080767 A1

- (51) International Patent Classification7: F02B 41/10, 33/36, 37/12, F01C 21/16, 11/00, 1/12, F02D 41/00
- (21) International Application Number:

PCT/GB2005/000622

- (22) International Filing Date: 18 February 2005 (18.02.2005)
- (25) Filing Language:

English

(26) Publication Language:

English


(30) Priority Data:

0403718.0

19 February 2004 (19.02.2004)

- (71) Applicant (for all designated States except US): EPICAM LIMITED [GB/GB]; Lintech Court, The Grip, Linton, Cambridgeshire CB1 6XN (GB).
- (72) Inventor; and

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available); ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

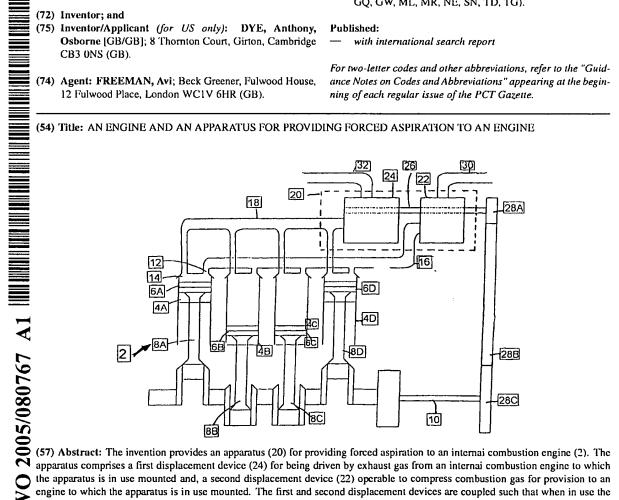

the apparatus is in use mounted and, a second displacement device (22) operable to compress combustion gas for provision to an engine to which the apparatus is in use mounted. The first and second displacement devices are coupled such that when in use the first displacement device (24) is driven and causes the second displacement device (22) to operate.